Adapter PCIe > CFexpress / XQD (The driver is required for XQD)

CFexpress socket with push-push function
for easy insertion/extraction of CFexpress Card
Support PCIe Generation 3 x 2
Support NVMe communication agreement

1 x CFexpress slot

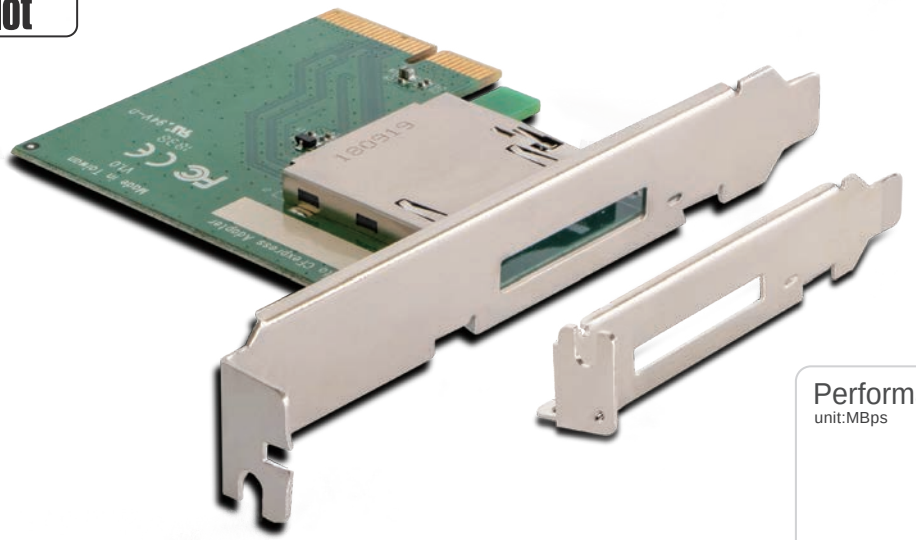

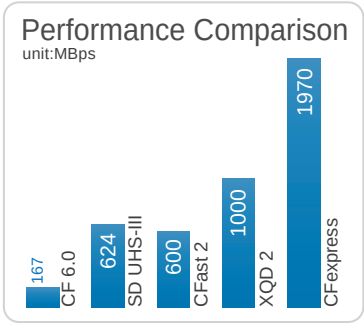





① external: 1 x CFexpress Card slot ② internal: 1 x PCI Express x 4

LxWxH: ca.68.0 x 65.3 x 6.4 mm / 2.68 x 2.57 x 0.25 inch
Weight: 40 g/ 0.75 oz

Windows
10

Mac OS
10.12 (Sierra) and higher

Support
power LED

push & push

TRAGANT International Co., Ltd. | DELOCK we move the world | NAVILOCK
台灣新北市23141新店區民權路108-2號7樓 統一編號：28500879
7F., No.108-2, Minquan Rd., Xindian Dist., New Taipei City 23141, Taiwan
Tel: +886-2-22180950 Fax: +886-2-22180990 / 886-2-22180978
E-mail: inquiry@tragant.com.tw / www.tragant.com.tw / www.delock.com.tw