


LTE Antenna RP-SMA plug

-0.9 - 2.3 dBi omnidirectional with tilt joint

-0.9 - 2.3 dBi

black

CE

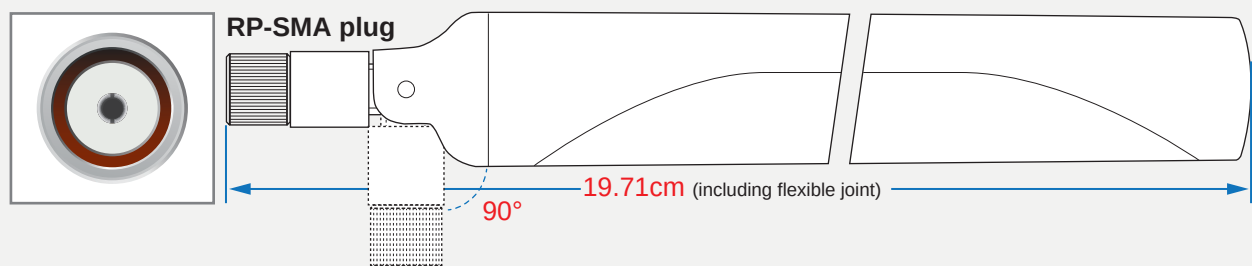

Frequency range
790 - 870 MHz
1710 - 1880 MHz
1920 - 2170 MHz
2400 - 2700 MHz



Gain
-0.9 - 2.3 dBi



Impedance
50 Ω



VSWR
4.0



Polarisation
linear, vertical



Operating temperature
-10 °C ~ 55 °C