


LTE Antenna SMA plug

0.1 - 4.5 dBi omnidirectional with tilt joint

0.1 - 4.5 dBi

black

CE

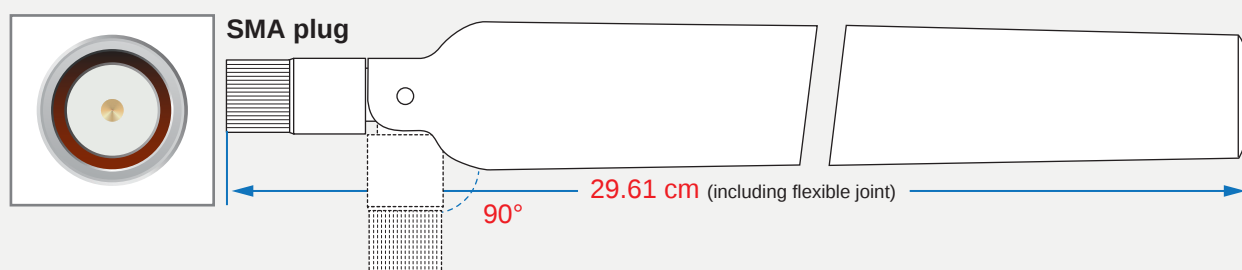

Frequency range
791 - 894 MHz
1920 - 2170 MHz



Gain
0.1 - 4.5 dBi



Impedance
50 Ω



VSWR
3.0



Polarisation
linear, vertical



Operating temperature
-10 °C ~ 55 °C